


FREQUENCY WALL TRIM

- Model 992W

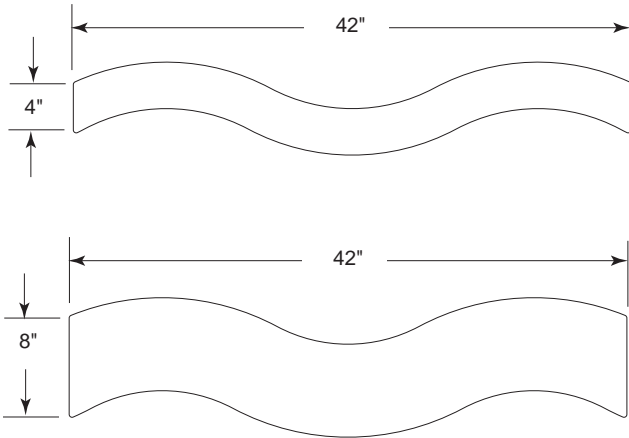

CONSTRUCTION:

- WALL TRIM shall be constructed of type 304, 22 gauge stainless steel in satin finish or 5.8 mil Lexan.

INSTALLATION:

Secure to surface by removing paper backing protecting adhesive and applying pressure to front after being placed in desired location.

GUIDE SPECIFICATION:

Wall trim shall be constructed of type 304, 22 gauge stainless steel in satin finish or 5.8 mil Lexan.

Width	Height	Material Option	Standard Part Number
42	4"	S	992W-0442S0
42	4"	L	992W-0442L0
42"	8"	S	992W-0842S0
42"	8"	L	992W-0842L0

OPTION CODES:

S = Stainless Steel

L = Lexan 5.8 mil (flexible, easy to cut or modify length)