

Architectural Abstract

Baroque™ Customline® WET-FELTED ACOUSTICAL CEILING PANELS

- Four dramatic geometric designs with 100% non-directional fissured pattern.
- Clean 3-dimensional scoring, free of fissures or pin perforations.
- Features deep shadow face scoring.
- Product's deep scoring complements the suspension system, masking the metal grid.


See reverse side for other scoring options and additional product specifications.



Item Number	Nominal Size (Inches)	Edge Detail	UL Classified NRC	CAC	LR	Sq. Ft. Per Carton
Safetone® Class A						
BQCL-224	24 x 48 x 3/4	Reveal	.55	35	.82	64
BQCLN-224	24 x 48 x 3/4	Narrow Reveal	.55	35	.82	64
BQCL-326*	24 x 48 x 3/4	Reveal	.50	35	.82	64
BQCLN-326*	24 x 48 x 3/4	Narrow Reveal	.50	35	.82	64
BQCL-448	24 x 48 x 3/4	Reveal	.50	35	.82	64
BQCLN-448	24 x 48 x 3/4	Narrow Reveal	.50	35	.82	64
BQCL-812	24 x 48 x 3/4	Reveal	.50	35	.82	64
BQCLN-812	24 x 48 x 3/4	Narrow Reveal	.50	35	.82	64
Protectone® (For specific UL fire resistance time-rated assemblies)						
PBQCL-224	24 x 48 x 3/4	Reveal	.50	40	.82	64
PBQCL-448	24 x 48 x 3/4	Reveal	.50	40	.82	64
PBQCL-812	24 x 48 x 3/4	Reveal	.50	40	.82	64

ASTM E 1264 Classification: Type III, Form 2, Pattern C D K
*BQCL-326 and BQCLN-326 have a One Year Limited Warranty.

Edge Detail Options



Reveal Edge
(Beveled) 1/16" Grid

Narrow Reveal Edge
(Beveled) 3/16" Grid

BioShield™ Option
Mold and mildew guard available as an option.




Popular Applications:

- Hospitality • Retail • Office • Education
- Healthcare • Restaurants




Scoring Options

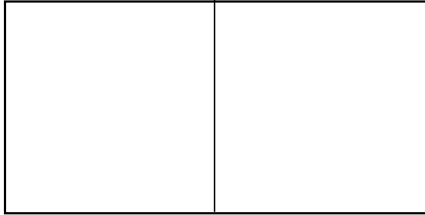


BQCL-224 (1⁵/₁₆" Grid) Size: 24" x 48"
 BQCLN-224 (9¹/₁₆" Grid) Surface Scoring:
 PBQCL-224 (1⁵/₁₆" Grid) Two 24" x 24" Panels



BQCL-448 (1⁵/₁₆" Grid) Size: 24" x 48"
 BQCLN-448 (9¹/₁₆" Grid) Surface Scoring:
 PBQCL-448 (1⁵/₁₆" Grid) Four 6" x 48" Panels

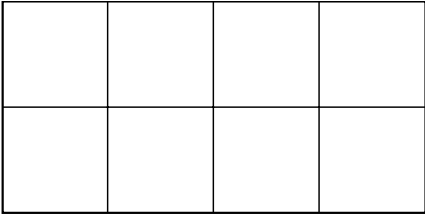

BQCL-812 (1⁵/₁₆" Grid) Size: 24" x 48"
 BQCLN-812 (9¹/₁₆" Grid) Surface Scoring:
 PBQCL-812 (1⁵/₁₆" Grid) Eight 12" x 12" Panels

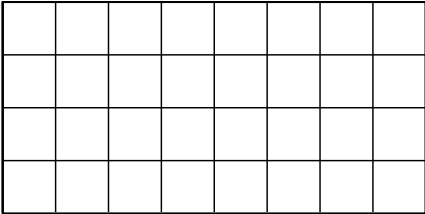

BQCL-326 (1⁵/₁₆" Grid) Size: 24" x 48"
 BQCLN-326 (9¹/₁₆" Grid) Surface Scoring:
 Thirty Two 6" x 6" Panels

PRODUCT SPECIFICATION DETAILS ACOUSTICAL CEILING SYSTEMS 09500

PART 2 - PRODUCTS

2.1 MATERIAL, GENERAL:

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 ACOUSTICAL CEILING UNITS:

1. Type III
2. Form 2
3. Pattern C D K
4. Non-directional fissured and perforated Baroque™ pattern surface scored to simulate [two 24"x 24" [four 6"x 48"] [eight 12"x 12"] [thirty two 6"x 6"] lay-in panels
5. Size 3/4" thick x 24"x 48"
6. Edge Detail [Reveal] [Narrow Reveal]
7. Noise Reduction Coefficient (NRC) [.50] [.55]
8. Ceiling Attenuation Class (CAC) [35] [40]
9. Light Reflectance Coefficient (LR) .82
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Underwriters Laboratories Inc. Fire Resistance Time-Rated Assembly* [G208] [G218] [G248] [G255]
13. Manufacturer, subject to compliance with requirements of this specification, BPB
14. Product Name Celotex® Brand [Baroque™ Customline®] [Protectone® Baroque™ Customline®]

* Relevant to Protectone® only. Refer to UL Fire Resistance Directory for specific design information.

Distributed by:

USA

BPB America Inc.
 5301 West Cypress St., Suite 300
 Tampa, FL 33607
 Toll Free: +1-866-427-2872
 Fax: +1-800-829-1422
 E-mail: crc@bpb-na.com
 Web: www.bpb-na.com

Canada

BPB Canada Inc.
 Architectural Products Sales Division
 6715 Ogden Dale Road SE
 Calgary, Alberta T2C 2A4
 Toll Free: +1-866-427-2872
 Fax: +1-800-829-1422
 E-mail: crc@bpb-na.com
 Web: www.bpb-na.com

Outside North America

BPB America Inc.
 5301 West Cypress St., Suite 300
 Tampa, FL 33607
 Phone: +1-813-286-3900
 Fax: +1-813-286-3908
 E-mail: international@bpb-na.com
 Web: www.bpb-na.com

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

®™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-4524 Rev./5M/0705

