

Architectural Abstract

Cashmere[®]

WET-FELTED ACOUSTICAL CEILING TILES & PANELS


- Upscale appearance.
- Lightly textured.
- Highly decorative edge detail choices.
- Full selection of sizes and edge details.
- BioShield™ is included as standard feature for added mold and mildew resistance.



Item Number	Nominal Size (Inches)	Edge Detail	UL Classified NRC	CAC	LR	Sq. Ft. Per Carton
Safetone[®] Class A						
CM-450	24 x 24 x 3/4	Narrow Reveal	.60	35	.82	56
CM-454	24 x 24 x 3/4	Reveal	.60	35	.82	56
CM-457	24 x 24 x 3/4	Trim	.60	35	.82	56
CM-462	12 x 12 x 3/4	Bevel, Kerfed	.60	35	.82	32
CM-490	24 x 48 x 3/4	Narrow Reveal	.60	35	.82	64
CM-494	24 x 48 x 3/4	Reveal	.60	35	.82	64
CM-497	24 x 48 x 3/4	Trim	.60	35	.82	64
CM-2060	20 x 60 x 3/4	Narrow Reveal	.60	35	.82	67
CM-2064	20 x 60 x 3/4	Reveal	.60	35	.82	67
CM-3030	30 x 30 x 3/4	Narrow Reveal	.60	35	.82	50
CM-3034	30 x 30 x 3/4	Reveal	.60	35	.82	50
Protectone[®] (For specific UL fire resistance time-rated assemblies)						
PCM-450	24 x 24 x 3/4	Narrow Reveal	.45	35	.82	56
PCM-454	24 x 24 x 3/4	Reveal	.45	35	.82	56
PCM-457	24 x 24 x 3/4	Trim	.45	35	.82	56
PCM-494	24 x 48 x 3/4	Reveal	.45	35	.82	64
PCM-497	24 x 48 x 3/4	Trim	.45	35	.82	64

ASTM E 1264 Classification: Type III, Form 1, Pattern E

Edge Detail Options

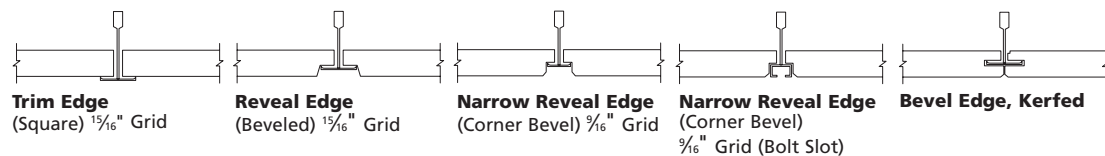

BioShield™
BioShield treatment included for added mold and mildew resistance.



Popular Applications:

- Galleries • Resorts • Hospitality
- Airports • Retail • Office • Education
- Healthcare • Restaurants • Salons



PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILING SYSTEMS

09500

PART 2: PRODUCTS


2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 MATERIALS

Acoustical Ceiling Units:

Size Options

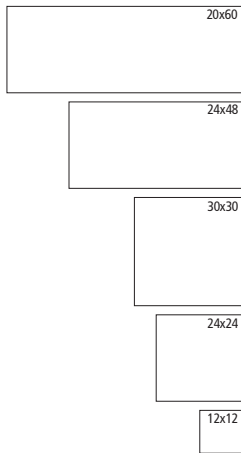

1. Type III
2. Form 1
3. Pattern E
4. Lightly textured nodular lay-in panels
5. Size 3/4" thick x [12"x 12"] [24"x 24"] [24"x 48"] [20"x 60"] [30"x 30"]
6. Edge Detail, Tile: Bevel, Kerfed. Lay-in panels:
[Trim] [Reveal] [Narrow Reveal] [Bevel Edge, Kerfed]
7. Noise Reduction Coefficient (NRC) [.45] [.55] [.60]
8. Ceiling Attenuation Class (CAC) [31] [35]
9. Light Reflectance Coefficient (LR) .82
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Underwriters Laboratories Inc. Fire-Resistance Time-Rated Assembly* [D203] [D205] [G208] [G218] [G248] [G255] [L201] [P204] [P259] [P260] [P261] [P262] [P264]
13. Manufacturer, subject to compliance with requirements of this specification, BPB
14. Product Name Celotex® Brand [Cashmere®] [Protectone® Cashmere®]

* Relevant to Protectone® Only. Refer to UL Fire Resistance Directory for specific design information.

Distributed by:

USA

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Canada

BPB Canada Inc.
Architectural Products Sales Division
6715 Ogden Dale Road SE
Calgary, Alberta T2C 2A4
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Outside North America

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Phone: +1-813-286-3900
Fax: +1-813-286-3908
E-mail: international@bpb-na.com
Web: www.bpb-na.com

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

©™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-4662 Rev.I/5M/0805

