

Architectural Abstract

Cashmere® Custom Options Cashmere® Fixture Openings

Fixture Openings


- Pre-cut panels factory painted to reduce on-site fabrication.
- Creates symmetry throughout ceiling plane.

See reverse side for additional product specifications.

To Specify Fixture Openings:


Add prefix (F) before designated Cashmere® item #. Add suffix (R) to specify round opening or (S) to specify square opening. For example: Item # CM-450 with a square fixture opening. Specify # (F) CM-450(S).

Note: Fixture cuts are available from 3" to 16" and are centered in the panel. Light fixtures, sprinkler heads and HVAC components must be supported independent of the ceiling panel. Consult manufacturers for appropriate components.

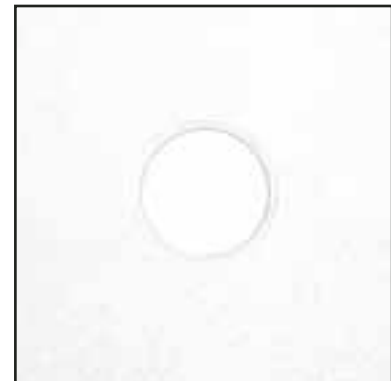

Fixture Openings


Edge Detail Options



Radius Reveal Edge
5/16" Grid

Reveal Edge
(Beveled) 15/16" Grid

Tier Reveal Edge
5/16" Grid



Narrow Reveal Edge
(Corner Bevel) 5/16" Grid

Narrow Reveal Edge
(Corner Bevel)
5/16" Grid (Bolt Slot)



BioShield™

BioShield treatment included for added mold and mildew resistance.



Popular Applications:

- Conference Centers • Resorts • Hospitality
- Retail • Education • Restaurants • Healthcare
- Offices • Airports • Galleries



PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILING SYSTEMS

09500

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.


2.1 Materials

Acoustical Ceiling Units:


1. Type III
2. Form 1
3. Pattern [E] [E K]
4. Lightly textured [face scored] nodulated lay-in panels
5. Size 3/4" thick x [12"x 12"] [24"x 24"] [24"x 48"] [20"x 60"] [30"x 30"]
5. Size 3/4" thick x 24" x 24"
6. Edge Detail [Reveal] [Narrow Reveal] [Radius Reveal] [Bevel Reveal] [Tier Reveal] [Narrow Reveal Screw Slot]
7. Light Reflectance Coefficient (LR) .82
Light Reflectance Designation LR-1
8. Color White
9. Flame Spread Classification Class A
10. Manufacturer, subject to compliance with requirements of this specification, BPB
11. Product Name Celotex® Brand Cashmere® Fixture Openings

Scoring Options

Unscored




(f) CMR-124(R)
(f) CMB-124(R)
(f) CMTS-124(R)
(f) CM-454(R)
(f) CM-450(R)




(f) CMR-124(S)
(f) CMB-124(S)
(f) CMTS-124(S)
(f) CM-454(S)
(f) CM-450(S)

Face Scored



(f) CMR-412(R)
(f) CMB-412(R)
(f) CMTS-412(R)



(f) CMR-412(S)
(f) CMB-412(S)
(f) CMTS-412(S)

Distributed by:

USA

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Canada

BPB Canada Inc.
Architectural Products Sales Division
6715 Ogdendale Road SE
Calgary, Alberta T2C 2A4
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Outside North America

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Phone: +1-813-286-3900
Fax: +1-813-286-3908
E-mail: international@bpb-na.com
Web: www.bpb-na.com

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

©™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-????/W/0405

