

Architectural Abstract

Cashmere® Style Edge NODULAR ACOUSTICAL CEILING PANELS

- Upscale appearance.
- Lightly textured with the appearance of fine fabric.
- Highly decorative edge detail choices.
- Scored options for added visual impact.
- BioShield™ feature included as standard feature for added mold and mildew resistance.

See reverse side for additional product specifications and face scoring options.


| Item Number | Nominal Size (Inches) | Edge Detail | UL Classified | | | Sq. Ft. Per Carton |
|--|-----------------------|-------------------------|---------------|-----|-----|--------------------|
| | | | NRC | CAC | LR | |
| Safetone® Class A | | | | | | |
| Radius Edge Cashmere Specifications | | | | | | |
| CMR-124 | 24 x 24 x 3/4 | Radius Reveal | .60 | 35 | .82 | 56 |
| CMR-412 | 24 x 24 x 3/4 | Radius Reveal | .60 | 35 | .82 | 56 |
| Protectone® (For specific UL fire resistance time-rated assemblies) | | | | | | |
| PCMR-124 | 24 x 24 x 3/4 | Radius Reveal | .45 | 35 | .82 | 56 |
| Safetone® Class A | | | | | | |
| Tier Edge Cashmere Specifications | | | | | | |
| CMTS-124 | 24 x 24 x 3/4 | Tier Reveal 9/16" Grid | .60 | 35 | .82 | 56 |
| CMTS-124-1516 | 24 x 24 x 3/4 | Tier Reveal 15/16" Grid | .60 | 35 | .82 | 56 |
| CMTS-412 | 24 x 24 x 3/4 | Tier Reveal 9/16" Grid | .60 | 35 | .82 | 56 |
| CMTS-412-1516 | 24 x 24 x 3/4 | Tier Reveal 15/16" Grid | .60 | 35 | .82 | 56 |
| Protectone® (For specific UL fire resistance time-rated assemblies) | | | | | | |
| PCMTS-124 | 24 x 24 x 3/4 | Tier Reveal 9/16" Grid | .45 | 35 | .82 | 56 |
| Safetone® Class A | | | | | | |
| Fluted Edge Cashmere Specifications | | | | | | |
| CMF-124 | 24 x 24 x 3/4 | Fluted Reveal | .55 | 31 | .82 | 56 |
| Please note: Invisigrille and factory painted fixture options not available for this item. | | | | | | |
| Safetone® Class A | | | | | | |
| Ogee Edge Cashmere Specifications | | | | | | |
| CMO-124 | 24 x 24 x 3/4 | Ogee Reveal | .55 | 31 | .82 | 56 |
| Please note: Invisigrille and factory painted fixture options not available for this item. | | | | | | |
| Safetone® Class A | | | | | | |
| Bevel Edge Cashmere Specifications | | | | | | |
| CMB-124 | 24 x 24 x 3/4 | Narrow Reveal Beveled | .60 | 35 | .82 | 56 |
| CMB-412 | 24 x 24 x 3/4 | Narrow Reveal Beveled | .60 | 35 | .82 | 56 |

ASTM E 1264 Classification: Type III, Form 1, Pattern E




BioShield™
BioShield treatment **included**
for added mold and mildew
resistance.

Edge Detail Options



Popular Applications:

- Conference Centers • Resorts • Hospitality
- Retail • Education • Restaurants • Healthcare
- Offices • Airports • Galleries

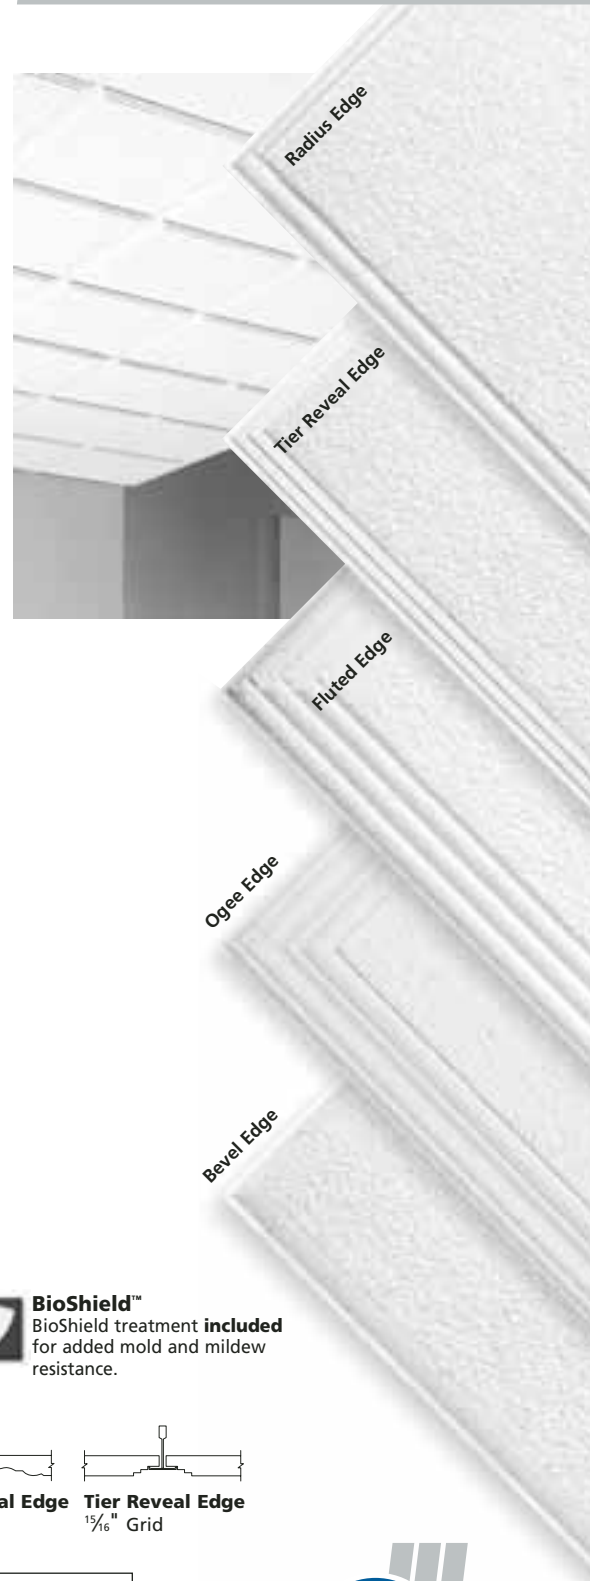

PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILING SYSTEMS

09500

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.


2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 1
3. Pattern E
4. [Lightly textured] [Lightly textured, surface scored to simulate four 12" x 12" nodular lay-in panels
5. Size 3/4" thick x 24" x 24"
6. Edge Detail: [Radius] [Tier] [Bevel] [Fluted] [Ogee]
7. Noise Reduction Coefficient (NRC) [.45] [.55] [.60]
8. Ceiling Attenuation Class (CAC) [31] [35]
9. Light Reflectance Coefficient (LR) .82
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Underwriters Laboratories Inc. Fire-Resistance Time-Rated Assembly* [D203] [D205] [G208] [G218] [G248] [G255] [P204] [P259] [P260] [P261] [P262] [P264]
13. Manufacturer, subject to compliance with requirements of this specification, BPB
14. Product Name Celotex® Brand [Cashmere® Style Edge] [Protectone® Cashmere® Style Edge]

*Relevant to Protectone® only. Refer to UL Fire Resistance Directory for specific design information.

Face Scoring



CMB-412
CMR-412
CMTS-412
CMTS-412-1516

Distributed by:

USA

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Canada

BPB Canada Inc.
Architectural Products Sales Division
6715 Ogdendale Road SE
Calgary, Alberta T2C 2A4
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Outside North America

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Phone: +1-813-286-3900
Fax: +1-813-286-3908
E-mail: international@bpb-na.com
Web: www.bpb-na.com

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

©™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-4701 Rev. I/W/0505

