

Architectural Abstract

Fine Fissured Customline® WET-FELTED CEILING PANELS


- Discreet small scale fissure pattern.
- Choice of four edge details for design creativity.
- Crisp scoring patterns provide options for expanded design possibilities.

See reverse side for scoring options and additional product specifications.

| Item Number | Nominal Size (Inches) | Edge Detail | UL Classified NRC | UL Classified CAC | LR | Sq. Ft. Per Carton |
|--|-----------------------|---------------|-------------------|-------------------|-----|--------------------|
| Safetone® Class A | | | | | | |
| FFT-224 | 24 x 48 x 3/4 | Tier Reveal | .55 | 35 | .83 | 64 |
| FFR-224 | 24 x 48 x 3/4 | Radius Reveal | .55 | 35 | .83 | 64 |
| FFCL-224 | 24 x 48 x 3/4 | Reveal | .55 | 35 | .83 | 64 |
| FFCLN-224 | 24 x 48 x 3/4 | Narrow Reveal | .55 | 35 | .83 | 64 |
| FFT-448 | 24 x 48 x 3/4 | Tier Reveal | .50 | 35 | .83 | 64 |
| FFCL-448 | 24 x 48 x 3/4 | Reveal | .50 | 35 | .83 | 64 |
| FFCLN-448 | 24 x 48 x 3/4 | Narrow Reveal | .50 | 35 | .83 | 64 |
| FFT-812 | 24 x 48 x 3/4 | Tier Reveal | .50 | 35 | .83 | 64 |
| FFCL-812 | 24 x 48 x 3/4 | Reveal | .50 | 35 | .83 | 64 |
| FFCLN-812 | 24 x 48 x 3/4 | Narrow Reveal | .50 | 35 | .83 | 64 |
| Protectone® (For specific UL fire resistance time-rated assemblies) | | | | | | |
| PFCL-224 | 24 x 48 x 3/4 | Reveal | .50 | 40 | .83 | 64 |
| PFCL-448 | 24 x 48 x 3/4 | Reveal | .50 | 40 | .83 | 64 |
| PFCL-812 | 24 x 48 x 3/4 | Reveal | .50 | 40 | .83 | 64 |

ASTM E 1264 Classification: Type III, Form 2, Pattern C D K

Edge Detail Options

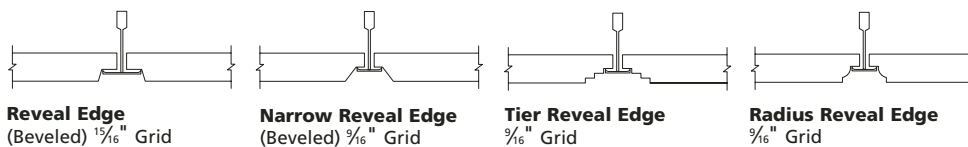

BioShield™ Option
Mold and mildew guard available as an option.




Popular Applications:

- Hospitality • Retail • Office • Education
- Healthcare • Restaurants




Fine Fissured Customline®

Scoring Options

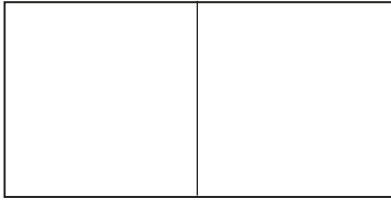


Fine Fissured 224

FFT-224 24"x 48"x 3/4" Tier (9/16" Grid)
FFR-224 Radius (9/16" Grid)
FFCL-224 Reveal
FFCLN-224 Narrow Reveal
PFFCL-224 Reveal



Fine Fissured 448

FFT-448 24"x 48"x 3/4" Tier (9/16" Grid)
FFCL-448 Reveal
FFCLN-448 Narrow Reveal
PFFCL-448 Reveal

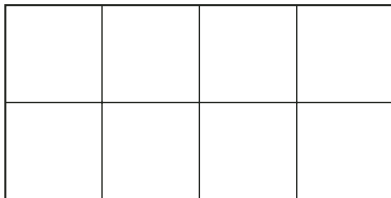

Fine Fissured 812

FFT-812 24"x 48"x 3/4" Tier (9/16" Grid)
FFCL-812 Reveal
FFCLN-812 Narrow Reveal
PFFCL-812 Reveal

PRODUCT SPECIFICATION DETAILS ACOUSTICAL CEILING SYSTEMS 09500

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 MATERIALS

Acoustical Ceilings Units:

1. Type III
2. Form 2
3. Pattern C D K
4. Discreet non-directional fissured surface scored to simulate [two 24"x 24"] [four 6"x 48"] [eight 12"x 12"] wet-felted lay-in panels
5. Size 3/4" thick x 24"x 48"
6. Edge Detail [Tier 9/16" Grid] [Radius 9/16" Grid] [Reveal] [Narrow Reveal]
7. Noise Reduction Coefficient (NRC) [.50] [.55]
8. Ceiling Attenuation Class (CAC) [35] [40]
9. Light Reflectance Coefficient (LR) .83
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Underwriters Laboratories Inc. fire resistance time-rated assembly *[G208] [G218] [G248] [G255]
13. Manufacturer, subject to compliance with requirements of this specification, BPB
14. Product Name Celotex® Brand [Fine Fissured Customline®] [Protectone® Fine Fissured Customline®]

*Relevant to Protectone® only. Refer to UL Fire Directory for specific design information.

Distributed by:

USA

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Canada

BPB Canada Inc.
Architectural Products Sales Division
6715 Ogden Dale Road SE
Calgary, Alberta T2C 2A4
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Outside North America

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Phone: +1-813-286-3900
Fax: +1-813-286-3908
E-mail: international@bpb-na.com
Web: www.bpb-na.com

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

®™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-4655 Rev.H/5M/0705

