

## Architectural Abstract

### Sand Micro™ WET-FELTED CEILING


- Special pulverized-marble aggregate coating provides rugged durability.
- Offers upscale look with additional durability and resists sagging.
- Designed for conditions where high temperatures and high humidity exist.
- Lightly textured surface provides attractive finish with excellent light reflectance and durability.
- Micro perforated for sound absorption.
- BioShield™ feature included as standard feature for added mold and mildew resistance.
- Use with other Sand products to achieve “checkerboarding”.\*



Item Number	Nominal Size	Edge Detail	UL Classified NRC	UL Classified CAC	LR	Sq. Ft. Per Carton
<b>Safetone® Class A</b>						
SHM-150	24 x 24 x 5/8"	Narrow Reveal	.40	35	.87	64
SHM-150M	600 x 600 x 15mm	Narrow Reveal	.40	35	.87	62
SHM-154	24 x 24 x 5/8"	Reveal	.40	35	.87	64
SHM-154M	600 x 600 x 15mm	Reveal	.40	35	.87	62
SHM-157	24 x 24 x 5/8"	Trim	.40	35	.87	64
SHM-157M	600 x 600 x 15mm	Trim	.40	35	.87	62
SHM-197	24 x 48 x 5/8"	Trim	.40	35	.87	64
SHM-197M	600 x 1200 x 15mm	Trim	.40	35	.87	62

ASTM E 1264 Classification: Type III, Form 2, Pattern C E

#### Edge Detail Options

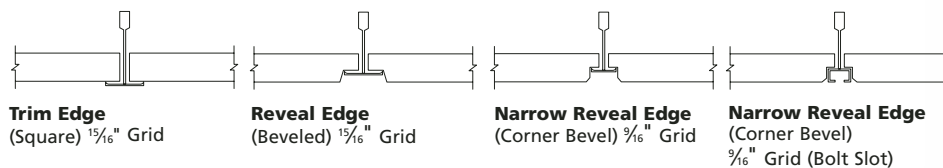

**BioShield™**  
BioShield treatment **included** for added mold and mildew resistance.



#### Popular Applications:

- Education • Retail • Malls • Offices • Healthcare
- Restaurants • Airports • Reception Areas



\* **Checkerboarding:** Using similar aesthetic products in the same room, same offices, same building or same complex to achieve a consistent look while meeting various acoustical performance needs and budgets.

# PRODUCT SPECIFICATION DETAILS

## ACOUSTICAL CEILING SYSTEMS

### 09500

## PART 2: PRODUCTS

### 2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

### 2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 2
3. Pattern C E
4. Micro perforated wet-felted lay-in panel
5. Size [5/8"] [15mm] thick x [24"x 24"] [24"x 48"] [600x600mm] [600x1200mm]
6. Edge Detail [Trim (Square)] [Narrow Reveal (Beveled)] [Narrow Reveal (Corner Bevel)] [Reveal (Beveled)]
7. Noise Reduction Coefficient (NRC) .40
8. Ceiling Attenuation Class (CAC) 35
9. Light Reflectance Coefficient (LR) .87  
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Manufacturer, subject to compliance with requirements of this specification, BPB
13. Product Name Celotex® Brand Sand Micro™

#### Standard Sizes

24" x 24"

24" x 48"

Distributed by:

#### USA

**BPB America Inc.**  
5301 West Cypress St., Suite 300  
Tampa, FL 33607  
Toll Free: +1-866-427-2872  
Fax: +1-800-829-1422  
E-mail: [crc@bpb-na.com](mailto:crc@bpb-na.com)  
Web: [www.bpb-na.com](http://www.bpb-na.com)

#### Canada

**BPB Canada Inc.**  
Architectural Products Sales Division  
6715 Ogdendale Road SE  
Calgary, Alberta T2C 2A4  
Toll Free: +1-866-427-2872  
Fax: +1-800-829-1422  
E-mail: [crc@bpb-na.com](mailto:crc@bpb-na.com)  
Web: [www.bpb-na.com](http://www.bpb-na.com)

#### Outside North America

**BPB America Inc.**  
5301 West Cypress St., Suite 300  
Tampa, FL 33607  
Phone: +1-813-286-3900  
Fax: +1-813-286-3908  
E-mail: [international@bpb-na.com](mailto:international@bpb-na.com)  
Web: [www.bpb-na.com](http://www.bpb-na.com)

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

©™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-4869 Rev.F/10M/0505

