


Architectural Abstract

Sand Micro™ Customline

CLASSIC MINERAL CEILING SYSTEMS

- Special pulverized marble aggregate coating for rugged durability.
- Upscale look that offers durability and resists sagging.
- Clean 3-dimensional scoring for visual impact.
- Designed for conditions where high temperatures and high humidity exist.
- Micro perforated for aesthetics and sound absorption.
- Lightly textured surface provides an attractive finish with excellent light reflectance and durability.
- Use with other Sand products to achieve "checkerboarding".*


See reverse side for additional product specifications.

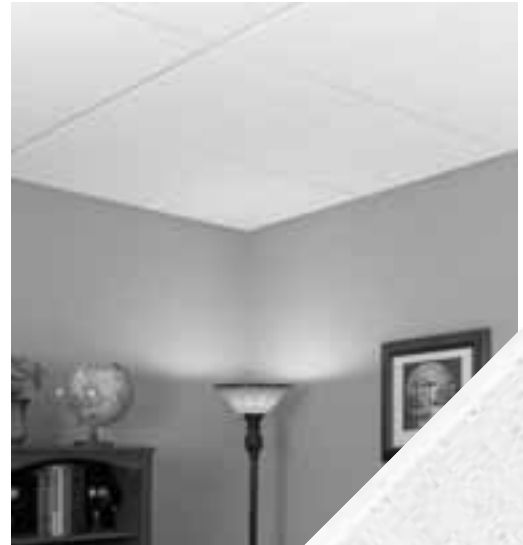

Item Number	Nominal Size	Edge Detail	UL Classified			Sq. Ft. Per Carton
Safetone® Class A						
			NRC	CAC	LR	
SMCL-224	24 x 48 x 3/4"	Reveal	.40	35	.87	64


ASTM E 1264 Classification: Type III, Form 2, Pattern C E K

Edge Detail



Reveal Edge
(Beveled) 1/8" Grid

Standard Size



24" x 48"
SMCL-224



BioShield™

BioShield treatment **included** for added mold and mildew resistance.



Popular Applications:

- Hospitality • Retail • Office
- Education • Healthcare • Restaurants



***Checkerboarding:** Using similar aesthetic products in the same room, same offices, same building or same complex to achieve a consistent look while meeting various acoustical performance needs and budgets.

PRODUCT SPECIFICATION DETAILS

ACOUSTICAL CEILING SYSTEMS

09500

PART 2: PRODUCTS

2.1 GENERAL

Provide Acoustical Ceiling Material manufactured to meet requirements of this specification in accordance with ASTM E 1264.

2.2 MATERIALS

Acoustical Ceiling Units:

1. Type III
2. Form 2
3. Pattern C E K
4. Micro perforated and surface scored to simulate two 24"x 24" wet-felted lay-in panels
5. Size 3/4" thick x 24"x 48"
6. Edge Detail Reveal
7. Noise Reduction Coefficient (NRC) .40
8. Ceiling Attenuation Class (CAC) 35
9. Light Reflectance Coefficient (LR) .87
Light Reflectance Designation LR-1
10. Color White
11. Flame Spread Classification Class A
12. Manufacturer, subject to compliance with requirements of this specification, BPB
13. Product Name Celotex® Brand Sand Micro™ Customline®

Distributed by:

USA

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Canada

BPB Canada Inc.
Architectural Products Sales Division
6715 Ogdendale Road SE
Calgary, Alberta T2C 2A4
Toll Free: +1-866-427-2872
Fax: +1-800-829-1422
E-mail: crc@bpb-na.com
Web: www.bpb-na.com

Outside North America

BPB America Inc.
5301 West Cypress St., Suite 300
Tampa, FL 33607
Phone: +1-813-286-3900
Fax: +1-813-286-3908
E-mail: international@bpb-na.com
Web: www.bpb-na.com

Characteristics, properties or performance of materials or systems manufactured by BPB herein described are derived from data obtained under controlled test conditions. BPB makes no warranties, express or implied, as to their characteristics, properties or performance under any variations from such conditions in actual construction. BPB assumes no responsibility for the effects of structural movement.

©™ Trademarks are the property of BPB plc or its affiliates and related companies.

NOTICE: The information in this document is subject to change without notice. BPB assumes no responsibility for any errors that may inadvertently appear in this document.

©2005 BPB America Inc. Printed in U.S.A. Form LCD-2244/5M/0205

