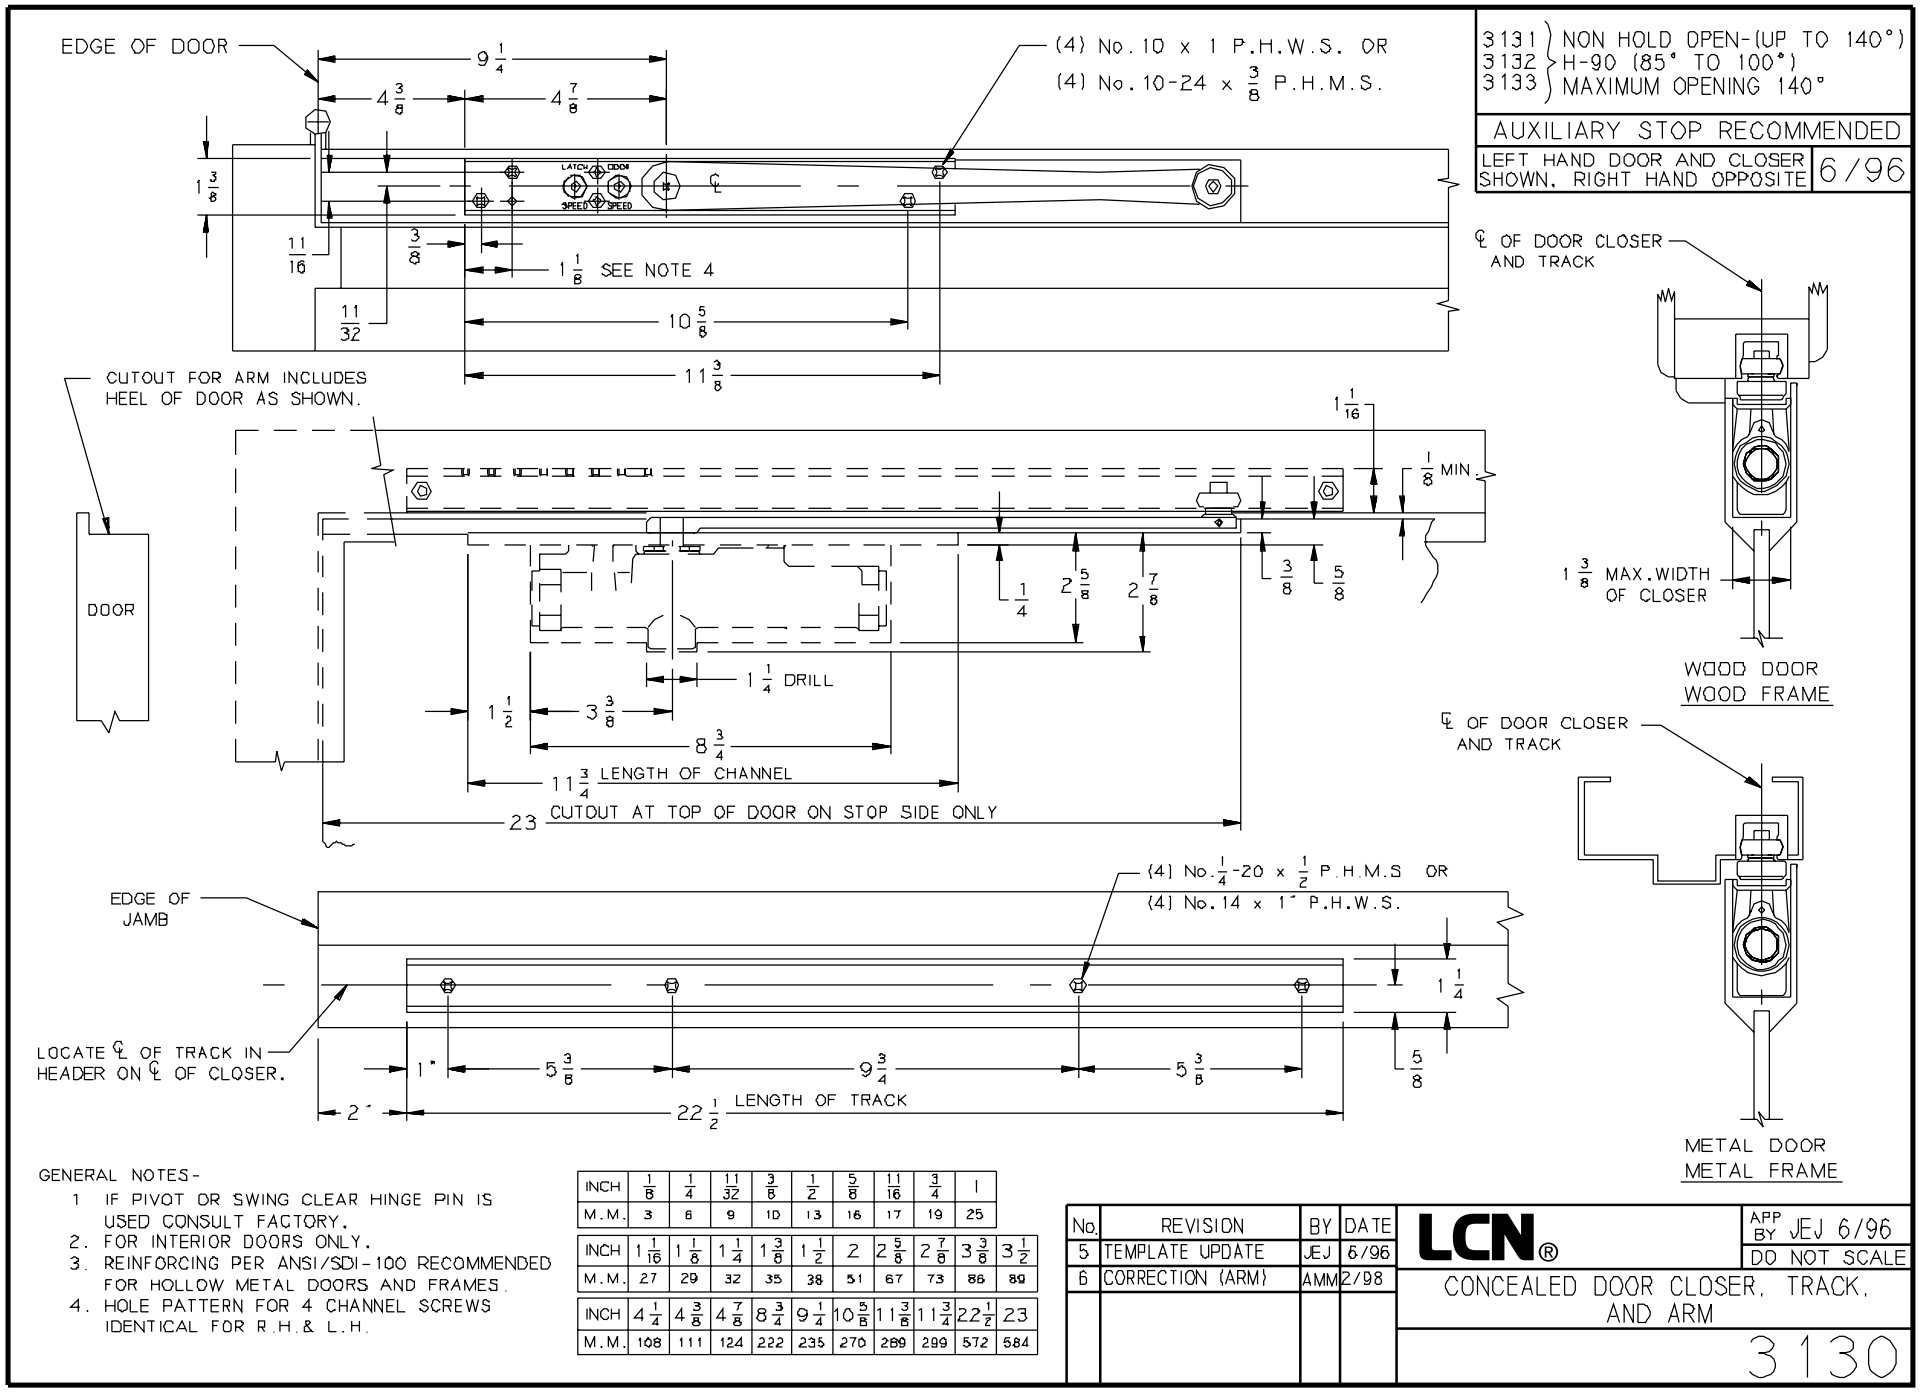

3131 } NON HOLD OPEN-(UP TO 140°)
3132 } H-90 (85° TO 100°)
3133 } MAXIMUM OPENING 140°

AUXILIARY STOP RECOMMENDED

LEFT HAND DOOR AND CLOSER SHOWN. RIGHT HAND OPPOSITE | 6/96

GENERAL NOTES-

1. IF PIVOT OR SWING CLEAR HINGE PIN IS USED CONSULT FACTORY.
2. FOR INTERIOR DOORS ONLY.
3. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS AND FRAMES.
4. HOLE PATTERN FOR 4 CHANNEL SCREWS IDENTICAL FOR R.H. & L.H.

INCH	1/8	1/4	11/32	3/8	1/2	5/8	11/16	3/4	1
M.M.	3	6	9	10	13	16	17	19	25

INCH	1 1/16	1 1/8	1 1/4	1 3/8	1 1/2	2	2 5/8	2 7/8	3 3/8	3 1/2
M.M.	27	29	32	35	38	51	67	73	86	89

INCH	4 1/4	4 3/8	4 7/8	8 3/4	9 1/4	10 5/8	11 3/8	11 3/4	22 1/2	23
M.M.	108	111	124	222	235	270	289	299	572	584

No.	REVISION	BY	DATE
5	TEMPLATE UPDATE	JEJ	6/96
6	CORRECTION (ARM)	AMM	2/98

LCN®

APP BY JEJ 6/96

DO NOT SCALE

CONCEALED DOOR CLOSER, TRACK, AND ARM

3130

© 2000 Ingersoll-Rand Company