


4811 } 90° POWER OPENING  
 170° MAX. OPENING

AUXILIARY STOP RECOMMENDED  
 RIGHT HAND DOOR AND CLOSER  
 SHOWN, LEFT HAND OPPOSITE 6/96

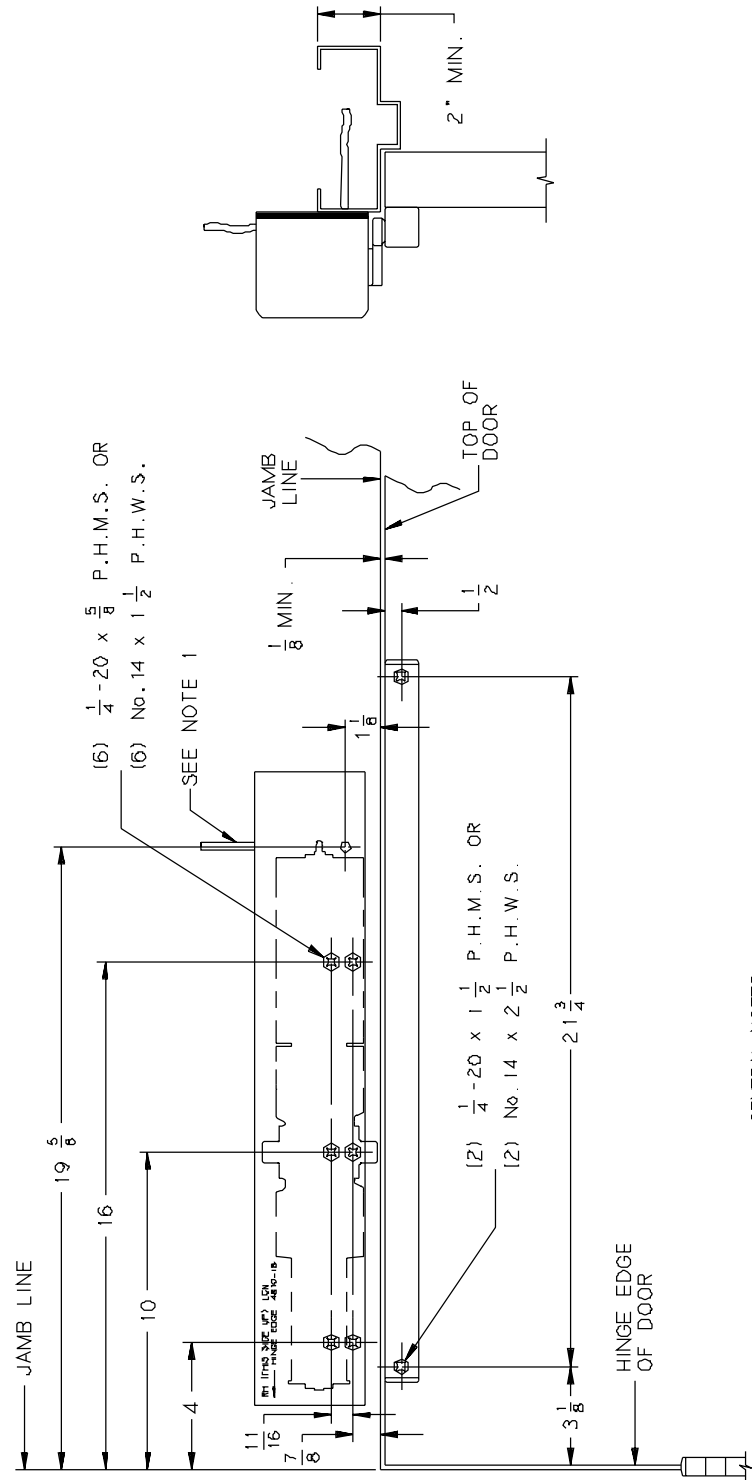

GENERAL NOTES:

1. 1/8" I. D. TUBING CONNECTED TO CONTROL BOX.
2. LOCATE CLOSER & TRACK FROM 1/4" OF PIVOT OR SWING CLEAR HINGE PIN IF USED.
3. CLOSER SIZE 20" x 3 1/2" x 3 5/16".
4. REINFORCING PER ANSI/SDI-100 RECOMMENDED FOR HOLLOW METAL DOORS & FRAMES.
5. MOUNT PROPER SIDE OF MOUNTING PLATE PER HAND OF DOOR.
6. MAXIMUM BUTT HINGE 5" x 5".

INCH	1/8	1/4	3/8	1/2	5/8	11/8	7/8	1 1/8	1 1/2	2
M.M.	3	6	13	16	16	22	29	36	51	51
INCH	2 1/2	3 1/8	3 3/8	3 1/2	4	10	16	19 3/8	20	21 3/4
M.M.	64	79	84	89	102	254	406	498	508	552

AUXILIARY STOP RECOMMENDED

RIGHT HAND SHOWN, LEFT HAND OPPOSITE

No.	REVISION	BY	DATE	<b>LCN</b> <sup>®</sup> PULL SIDE/TOP JAMB MOUNTED NON-HANDED AUTO-EQUALIZER	APP BY JEJ 6/96
2	TEMPLATE UPDATE	JEJ	6/96		DO NOT SCALE
					4810